

Safety Data Sheet

1. Trade Name & Product Information

Supplier: Hayes UK Limited
Unit 7 Eagle Industrial Estate, Billingshurst,
West Sussex, England, RH14 9RZ.
Tel: 01403 785857 Fax: 01403 785856

Product Name(s): Temporary Heavy Duty Continuity Bond 1.2m British Gas Spec

Temporary Heavy Duty Continuity Bond Cable

Applications: High temperature cable used in switchgear, controlgear and instrumentation panels.

Conductors: Plain annealed flexible copper. Class 5.

Sheath/Jacket: PVC (Polyvinyl chloride) heat resistant



Colour: Black, blue, brown, green/yellow, grey, orange, pink, red, violet, white & yellow

Voltage: 600/1000v

Operating Temperature: Maximum 105°C, minimum bending 0°C

Standards: 0.5sqmm-120sqmm: Tri-rated BS6231: Single core cables, PVC insulated for switchgear and control gear UL (Underwriters laboratories) & CSA (Canadian standards approval)
150sqmm-300sqmm: Bi-rated UL & CSA only.

Crocodile Clips (150-200AMP - Length 170MM)

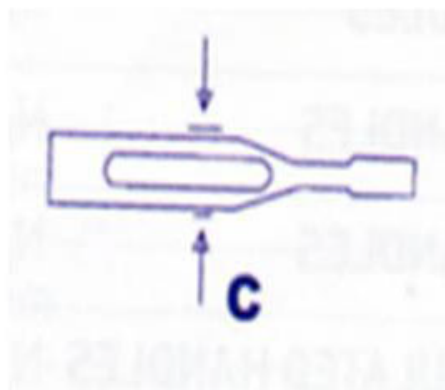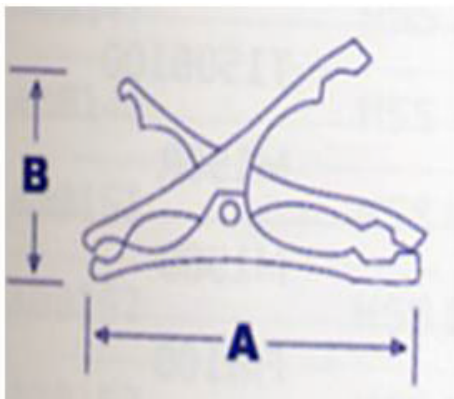

A= 140mm B= 50mm c = 19.5mm
Material = Bright Spangled galvanised steel.